




# D400PHHJD4

ADJUSTABLE PRESSURE \ TIER 4 FINAL \ PORTABLE COMPRESSOR

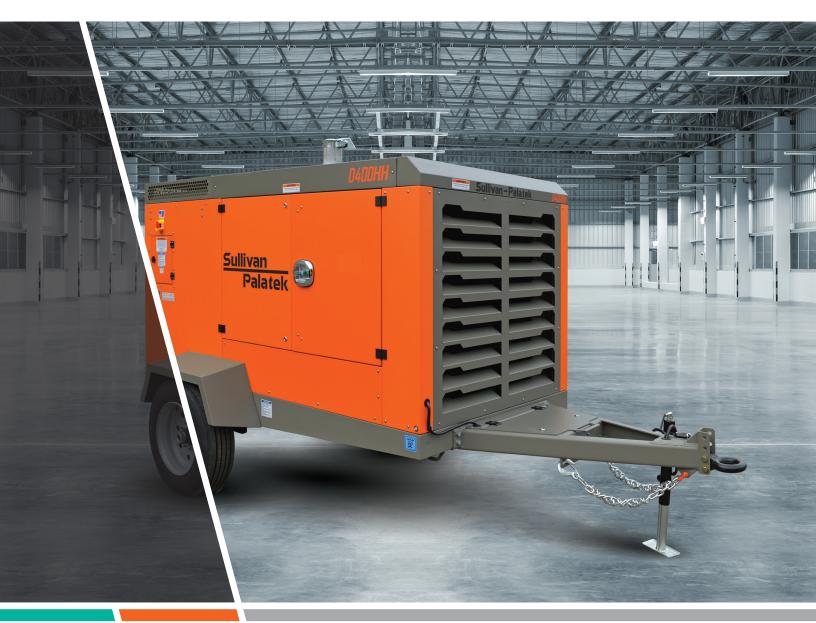

400CFM/90-200PSI

## **SPECIFICATIONS**

# Compressor

Model	D400PHHJD4
Rated Delivery	400 CFM (11.3 m <sup>3</sup> /min)
Rated Pressure	90-200 psig (6.2-13.8 Bar)
Adjustable Operating Pressure	70-215 psig (4.9 - 14.82 Bar)
Estimated Weight, Serviced	5,956 lbs
Dimensions L x W x H - in" (w/o Running Gear L x W x H)	152" x 84.5" x 91" (106" x 60" x 69")

## Engine

Туре	Diesel
Make & Model	JOHN DEERE 4045 TIER 4 FINAL
Idle Speed	1600 RPM
Fuel Tank Capacity	80 gal (303 L)
Horsepower @ rated RPM	173 hp (129 kW)
Full Load Speed	2400 RPM
DEF Tank	9.2 gal (34.8 L)

\*DEF Fluid Required



#### **FEATURES**

- » Large, 163mm Diameter Twin Screw Air End
- » Exclusive Three Year Warranty on Air End, Unlimited Hours
- » Automatic 0 to 100% Capacity Control
- » Two Stage Dry Type Air Filter with Indicators
- » Oil Level Sight Gauge
- » Stacked Coolers for Compressor and Engine
- » Cooler Access Doors for Cleaning
- » Tires: ST 215/75 R 17.5 Radial W 8 Lug Wheel
- » Choice of Lunette Eye or Ball Hitch on Height Adjustable Drawbar
- » Noise Level Limited to Maximum of 76 dBA at 7 Meters
- » Galvanneal Enclosure-Rust & Corrosion Resistant
- » Automatic Safety Shutdown
  - High Compressor Discharge Temperature
  - High Engine Temperature
  - · Low Engine Oil Pressure
- » Full Containment Frame
- » Remote Drains
- » Automatic Blowdown Valve
- » LED Stop, Turn, Tail Lights
- » Unloaded Starting
- » Battery: 1000 CCA
- » E-Stop

## **CONTROLLER**

### **Sullivan-Palatek Electronic** Controller (SPEC)

Digital Readouts:

- » Compressor Temperature
- » Discharge Pressure
- » Engine Oil Pressure
- » Engine Coolant Temperature
- » Voltmeter
- Tachometer
- » Fuel Level Low Fuel Warning and Shutdown
- » Complete Engine Diagnostic
- » Multilingual Capabilities
- » Waterproof IP66/67
- » Air Filter Service
- » Aftercooler Filter Warning

Sullivan-Palatek, Inc.



219.874.2497



🗯 sullivan-palatek.com 🛮 🖄 info@palatek.com

